

**STORK®**

# CLIMATIZER RSE 3200

For drying and storage of lacquered screens



STORK PREPRINT SYSTEMS

Stork Preprint Systems  
 P.O. Box 177  
 5830 AD Boekee  
 The Netherlands  
 Tel. +31 485-590555  
 Fax +31 485-574068

## DRYING LACQUER ON SCREENS

After a lacquer coating has been applied to the screens, this lacquer must be dried. The RSE 3200 Climatizer can hold 9 screens of 64 cm repeat.

The design of the Climatizer is such that screens can be easily placed into and removed from the cabinet. The desired temperature and relative humidity can be easily set on the control panel. The subsequent drying process is completely automatic. The cabinet is equipped with an exhaust device, so that any solvent vapours released by the lacquer are discharged and do not get into working environment around the cabinet.


Thanks to its sound insulation the Stork Climatizer consumes little energy.

Coated screens may be stored in the Climatizer for a couple of days prior to exposure.



## THE RSE 3200 CLIMATIZER

- Readily accessible and easy to open and close
- Simple and easy-to-view control panel
- Reproducible process
- Low energy consumption
- In accordance with CE safety standard

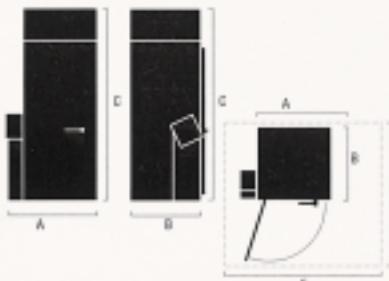

Dimensions in mm

	A	B	C	Max. screen length
RSE 3210	1450	1220	3100	2080
RSE 3220	1450	1220	4100	3050
RSE 3230	1450	1220	4550	3500

Installation area in mm

D	E	Height
2300	2500	3500
2300	2500	4500
2300	2500	4950

P = 7 kVA.

Room must be clean and dustless.